

Joystick Switches




More than safety.



EUCHNER

More than safety.

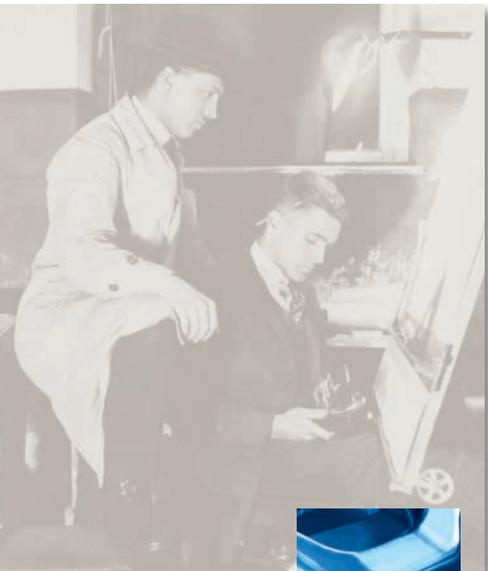

Emil Euchner, the company's founder and inventor of the multiple limit switch, circa 1928.



Around the world – the Swabian specialists in motion sequence control for mechanical and systems engineering.

EUCHNER's history began in 1940 with the establishment of an engineering office by Emil Euchner. Since that time, EUCHNER has been involved in the design and development of switchgear for controlling a wide variety of motion sequences in mechanical and systems engineering. In 1953, Emil Euchner founded EUCHNER + Co., a milestone in the company's history. In 1952, he developed the first multiple limit switch – to this day a symbol of the enterprising spirit of this family-owned company.

Automation – Safety – ManMachine

Today, our products range from electromechanical and electronic components to complex system solutions. With this wide range of products we can provide the necessary technologies to offer the right solution for special requirements – regardless of whether these relate to reliable and precise positioning or to components and systems for safety engineering in the automation sector.

EUCHNER products are sold through a world-wide sales network of competent partners. With our closeness to the customer and the guarantee of reliable solutions throughout the globe, we enjoy the confidence of customers all over the world.

Quality, reliability, precision

Quality, reliability and precision are the hallmarks of our corporate philosophy. They represent concepts and values to which we feel totally committed.

At EUCHNER, quality means that all our employees take personal responsibility for the company as a whole and, in particular, for their own field of work. This individual commitment to perfection results in products which are ideally tailored to the customers' needs and the requirements of the market. After all: our customers and their needs are the focus of all our efforts. Through efficient and effective use of resources, the promotion of personal initiative and courage in finding unusual solutions to the benefit of our customers, we ensure a high level of customer satisfaction. We familiarize ourselves with their needs, requirements and products and we learn from the experiences of our customers' own customers.

EUCHNER – More than safety.



Quality – made by EUCHNER

Joystick switches

Application		4
Design and function		4
Advantages/features		4
Series		5
Series WK...	Control panel installation to IEC 947-5-1 D30	6
Series WE...	Control panel installation at rear or with front plate	8
Series KB...	Control panel installation to IEC 947-5-1 D30	10
Series KF...	Control panel installation at rear	12
Series KE...	Control panel installation to IEC 947-5-1 D22	14
Series KC...	Control panel installation at rear or with front plate	16
Series KP...	Analog Joystick Control panel installation at rear or with front plate	19
	Universal Power Supply Unit P1/P2 for series KP joysticks	22
	Housing HBL	23
	Front plate for housing HBL	24

Application

Joystick switches or joysticks are manually actuated control devices for installation in control and front panels as well as in portable control equipment. They are used wherever motion sequences analogous to the actuation direction are controlled by hand. They are ideal for raising, lowering and triggering movements to the right and left, just to name some few possibilities.

EUCHNER joysticks are used in the steel and construction industry, in machine tools, for transport and conveyor systems, in the system and mechanical engineering sectors and for warehousing, medical and studio technology. With the ® (Germanischer Lloyd) certification, the devices are approved for use in the ship-building industry.

EUCHNER joysticks are also used for radio and cable controls, building machinery and cranes.



Joysticks as control equipment in remote control devices



Remote cable control for concrete pumps



Design and function

Microswitches with a step function response are used as switching elements. Due to the intermittent control, a clear switching function is given for precise control systems. Depending on the respective application, switching elements with a power rating of between 4mA and 16A can be used. These are fixed on the mounting plate for each different series, either individually or in groups. The switching elements are actuated by the joystick being moved out of the intermediate position. The robust levers made of stainless steel are bedded with a hinged ball bearing that is fixed in a front plate.

Advantages/features

Direction of movement:

- ▶ Simplification of the command control station
- ▶ Easy mounting due to the slots in the panel
- ▶ Small space requirement
- ▶ Long service life
- ▶ Robust and lasting construction
- ▶ High protection class: IP 65 and beyond

Models

EUCHNER joystick switches are available in a number of different models:



Series WK...
(page 6)



Series WE...
(page 8)



Series KB...
(page 10)



Series KF...
(page 12)



Series KE...
(page 14)



Series KC...
(page 16)



Series KP...
(page 19)



Housing kits
(from page 22)
suitable for series
WK, KB, KE
and KF


Series WK...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH




- ▶ Control panel installation to IEC 947-5-1 D30
- ▶ 1 to 8 actuating directions with spring return operation or combined
- ▶ One changeover contact with tab connector 2.8 x 0.5 IEC 760 for each actuating direction
- ▶ Centre position switch
- ▶ Pushbutton in handle


Dimension drawing

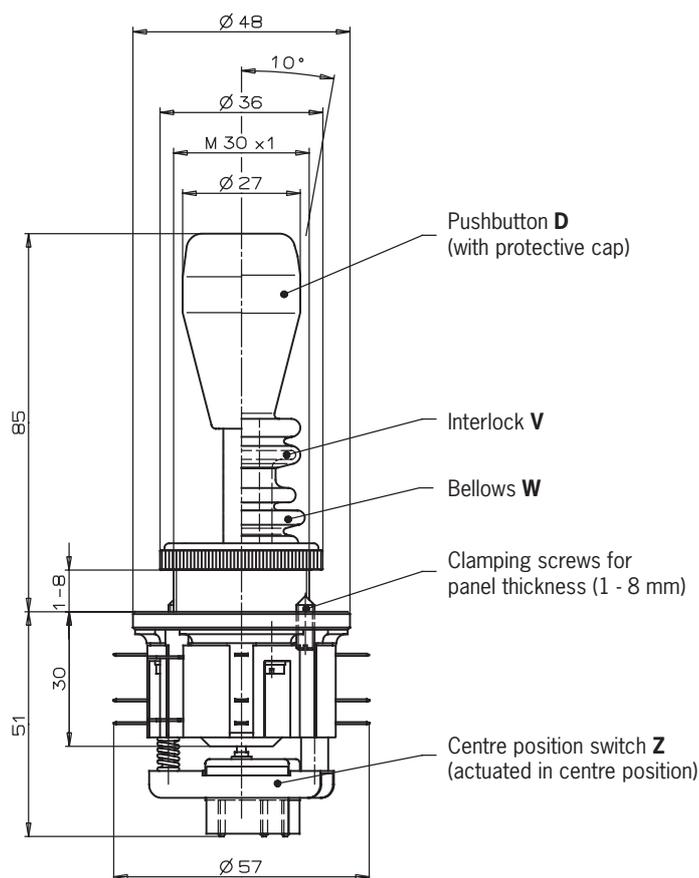

Panel cutout



Actuating directions



Connection **D**
(the connection is located on the underside for types with 8 directions)

Ordering code

W	K			
----------	----------	--	--	--

Series

Actuating direction and switching behavior

Stayput switch **S** (switching lever latches in selected position)
Spring return switch **T** (switching lever returns to centre position)

Options

Pushbutton **D**
Bellows **W**
Interlock **V**
Centre position switch **Z**
All-round actuation **R**

Technical data

Parameters	Value	Unit
Housing material	glass-fibre reinforced thermoplastic / aluminum	
Switching lever material	stainless steel	
Degree of protection to IEC 529 on actuating side with / without bellows	IP65 / IP54	
Mounting method	IEC 947-5-1 D30	
Weight	approx. 0.17	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-5 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	8	
Connection type	tab connector 2.8 x 0.5 IEC 760	
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch, type ES 584	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 4 A	
Utilization category DC 13	24 V / 2 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Contact material	silver alloy, gold on request	
Short circuit protection (control circuit fuse)	slow-blow T6 / quick-blow F10	A
Max. number of actuating directions	8	
All-round actuation R (spring return switch only)	actuation of 1 switching element (vertical or horizontal) or 2 adjacent switching elements (diagonal) simultaneously, with 8 microswitches *	
Switching positions per direction	1	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Bellows W	Option	
Interlock V in centre position	Option	
Centre position switch Z	Option	
Pushbutton D	Option	
Degree of protection to IEC 529	IP65	
Electrical life	5x10 ⁴ switching cycles at 0.7 A / 250 V AC	
Switching element	1 x NO contact	
Utilization category AC 15	230 V / 2 A	
Utilization category DC 13	24 V / 1 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Actuating force	< 8	N
Actuating travel	approx. 3	mm

Ordering examples:

Joystick switch series **WK**, actuating directions **1+3** stayput switch **S**,
actuating directions **2+4** spring return switch **T**, Pushbutton **D**, centre position switch **Z**,
Interlock **V** in centre position **WK S13 T24 DZV**

Joystick switch series **WK**, 8 switching elements as spring return switches, all-round actuation **R** **WK T1-8 R**

Design

Joystick switch series **WK**, 4 switching elements, 2 actuating directions
(2 switching elements per actuating direction) **on request**

* Diagonal actuation of 4 adjacent switching elements is on request.


Series WE...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH



- ▶ Control panel installation at rear or with front plate
- ▶ 1 to 8 actuating directions with stayput or spring return operation or combined
- ▶ One changeover contact with screw terminal for each actuating direction
- ▶ Centre position switch
- ▶ Pushbutton in handle

Dimension drawing

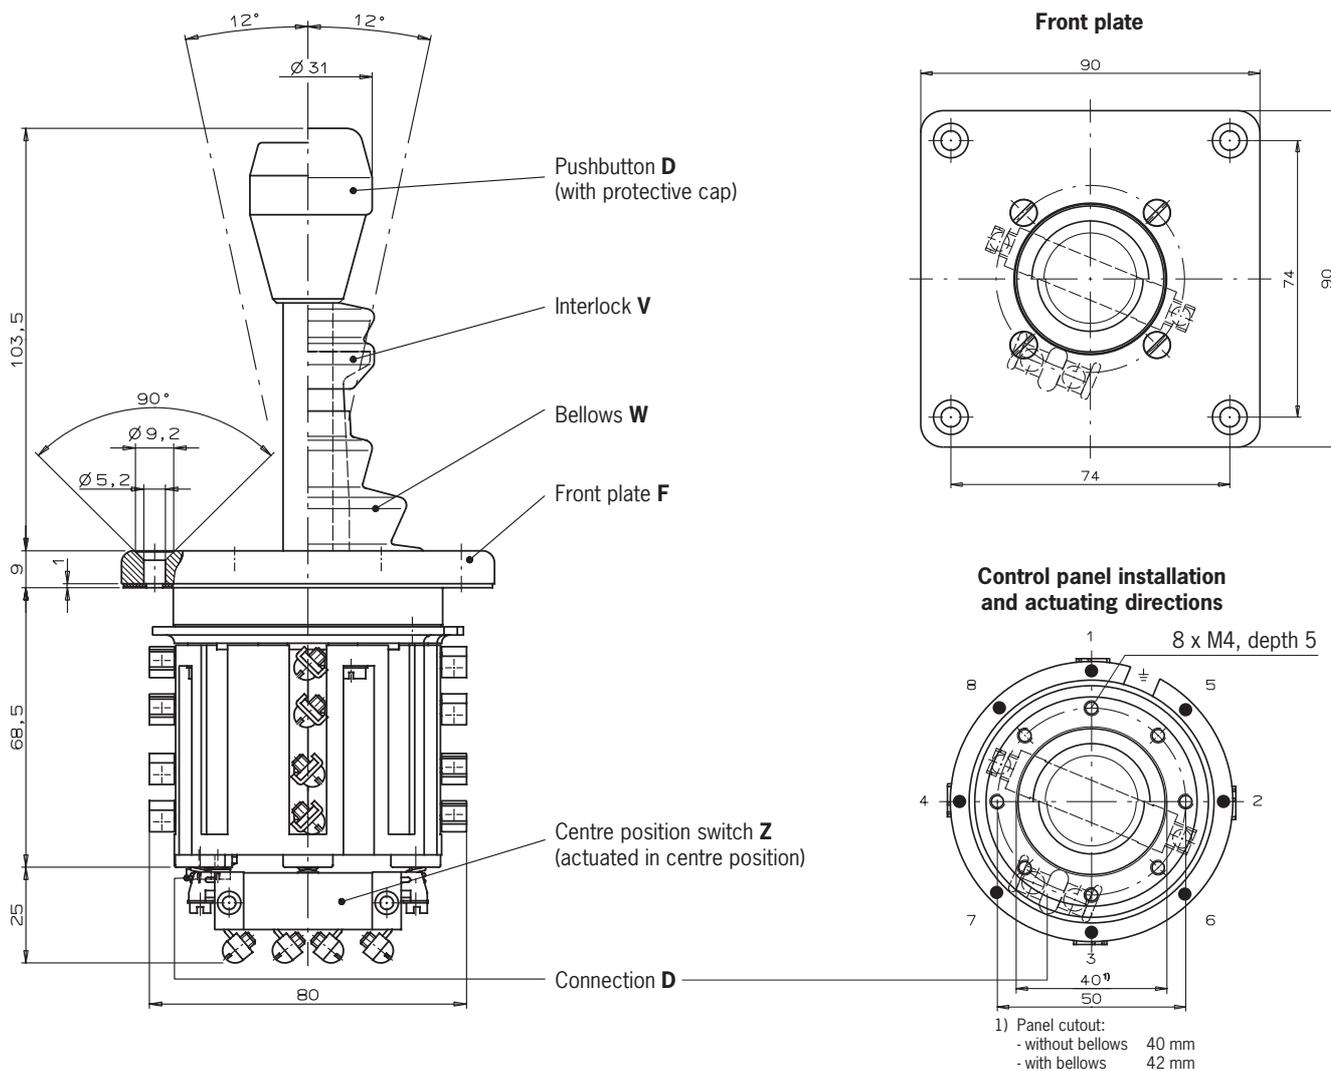

Ordering code

W	E		
----------	----------	--	--

Series _____

Actuating direction and switching behavior

- Stayput switch **S** (switching lever latches in selected position)
 Spring return switch **T** (switching lever returns to centre position)

Options

- Pushbutton **D**
 Bellows **W**
 Interlock **V**
 Centre position switch **Z**
 All-round actuation **R**
 Front plate **F**

Technical data

Parameters	Value	Unit
Housing material	glass-fibre reinforced thermoplastic / aluminum	
Switching lever material	galvanized steel	
Degree of protection to IEC 529 on actuating side with / without bellows	IP65 / IP54	
Mounting method	control panel installation at rear or with front plate	
Weight	approx. 0.65	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-5 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	8	
Connection type	screw terminal	
Contact elements	changeover contact Za IEC 947-5-1	
Switching principle	snap-action switch, type ES 502V1	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 10 A	
Utilization category DC 13	24 V / 4 A	
Min. switching current at 24 V	50	mA
Min. switching voltage	24	V
Contact material	silver alloy	
Short circuit protection (control circuit fuse)	slow-blow T16 / quick-blow F25	A
Max. number of actuating directions	8	
All-round actuation R (spring return switch only)	1 switching element is actuated per actuating direction	
Switching positions per direction	1	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Bellows W	Option	
Interlock V in centre position	Option	
Centre position switch Z	Option	
Pushbutton D	Option	
Degree of protection to IEC 529	IP65	
Electrical life	5x10 ⁴ switching cycles at 0.7 A / 250 V AC	
Switching element	1 x NO contact	
Utilization category AC 15	230 V / 2 A	
Utilization category DC 13	24 V / 1 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Actuating force	< 8	N
Actuating travel	approx. 3	mm

Ordering examples:

Joystick switch series **WE**, actuating directions **1+3** stayput switch **S**,
actuating directions **2+4** spring return switch **T**, Pushbutton **D**, centre position switch **Z**,
Interlock **V** in centre position

WE S13 T24 DZV

Joystick switch series **WE**, 8 switching elements as spring return switches, all-round actuation **R**

WE T1-8 R

Design

Joystick switch series **WE**, 4 switching elements, 2 actuating directions
(2 switching elements per actuating direction)

on request


Series KB...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH




- ▶ Control panel installation to IEC 947-5-1 D30
- ▶ 1 to 8 actuating directions, 4 switching elements. With stayput or spring return operation or combined
- ▶ One changeover contact with tab connector 6.3 x 0.8 IEC 760 for each actuating direction


Dimension drawing

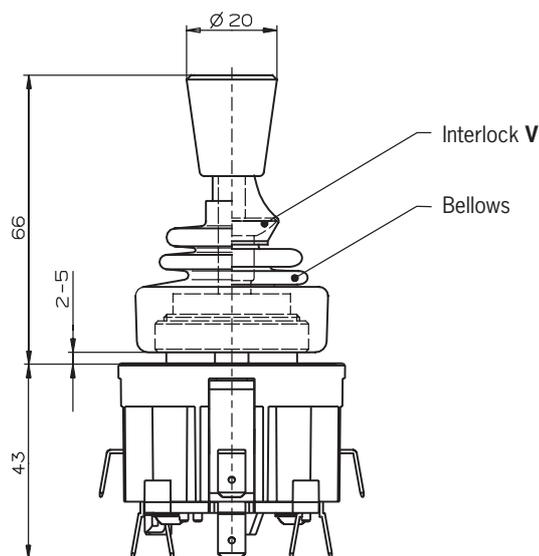

Panel cutout



Actuating directions

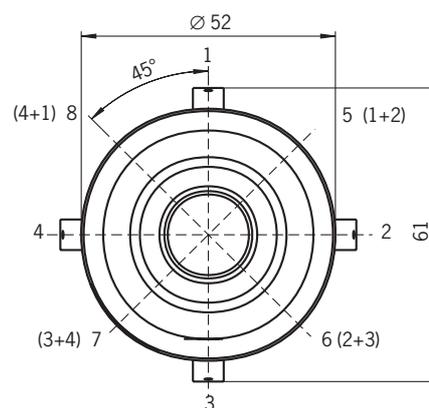

Ordering code

K	B			
----------	----------	--	--	--

Series _____

Actuating direction and switching behavior _____

Stayput switch **S** (switching lever latches in selected position)
Spring return switch **T** (switching lever returns to centre position)

Options _____

Interlock **V**
All-round actuation **R**¹⁾

1) Simultaneous actuation of 2 adjacent switching elements in diagonal actuating directions.

Technical data

Parameters	Value	Unit
Housing material	Thermoset	
Switching lever material	stainless steel	
Degree of protection to IEC 529 on actuating side with bellows	IP65	
Mounting method	IEC 947-5-1 D30	
Weight	approx. 0.2	kg
Mechanical life	spring return switch stayput switch	2x10 ⁶ switching cycles 1x10 ⁶ switching cycles
Ambient temperature with spring return switch	-5 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max number of switching elements	4	
Connection type	tab connector 6.3 x 0.8 screw terminal on request	IEC 760
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch, type ES 517 A	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 5 A	
Utilization category DC 13	24 V / 3 A	
Min. switching current at 24 V	10	mA
Min. switching voltage	12	V
Contact material	silver alloy	
Short circuit protection (control circuit fuse)	T10 / F20	A
Max. number of actuating directions	8	
All-round actuation R (spring return switch only)	actuation of 1 switching element (vertical or horizontal) or 2 adjacent switching elements (diagonal) simultaneously	
Switching positions per direction	1	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Interlock V in centre position	Option	

Ordering examples:

Joystick switch series **KB**, actuating directions **1+3** stayput switch **S**,
actuating directions **2+4** spring return switch **T**

KB S13 T24

Joystick switch series **KB**, actuating directions **1+3** spring return switch **T**,
Interlock **V** in centre position

KB T13 V



Series KF...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH




- ▶ Control panel installation at rear
- ▶ 1 to 8 actuating directions, 4 switching elements. With stayput or spring return operation or combined
- ▶ One changeover contact with screw terminal for each actuating direction
- ▶ Centre position switch

Dimension drawing

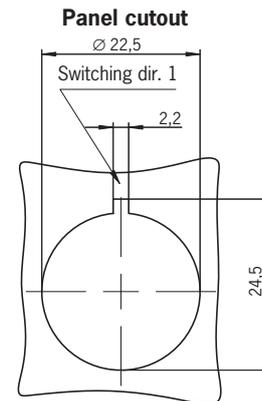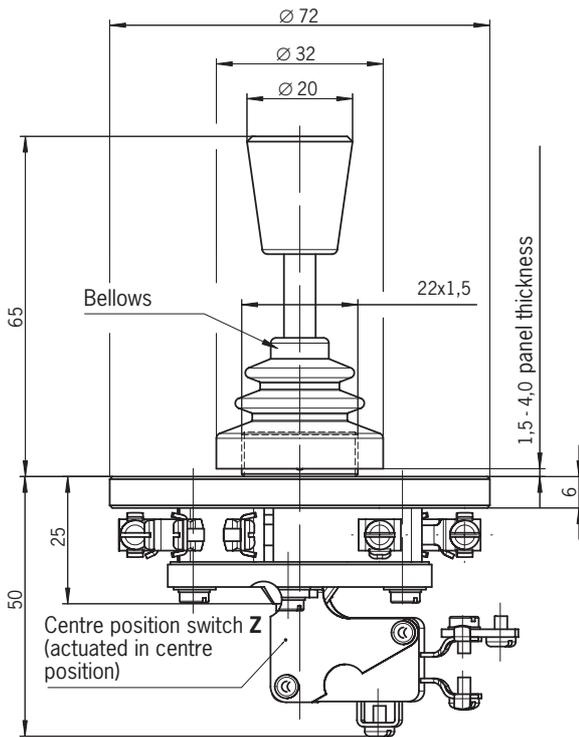

Actuating directions

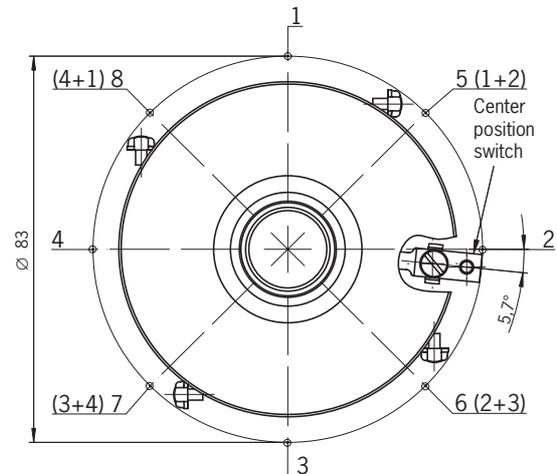

Ordering code

K	F			
----------	----------	--	--	--

Series _____

Actuating direction and switching behavior

Stayput switch **S** (switching lever latches in selected position)
Spring return switch **T** (switching lever returns to centre position)

Options

Centre position switch **Z**
All-round actuation **R**¹⁾

1) Simultaneous actuation of 2 adjacent switching elements in diagonal actuating directions.

Technical data

Parameters	Value	Unit
Housing material	Thermoset	
Switching lever material	stainless steel	
Degree of protection to IEC 529 on actuating side with bellows	IP65	
Mounting method	panel installation at rear	
Weight	approx. 0.2	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-25 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	4	
Connection type	screw terminal	
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch, type ES 517	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 5 A	
Utilization category DC 13	24 V / 3 A	
Min. switching current at 24 V	10	mA
Min. switching voltage	12	V
Contact material	silver alloy	
Short circuit protection (control circuit fuse)	slow-blow T10 / quick-blow F20	A
Max. number of actuating directions	8	
All-round actuation R	actuation of 1 switching element (vertical or horizontal) or 2 adjacent switching elements (diagonal) simultaneously	
Switching positions per direction	1	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Centre position switch Z	Option	

Ordering examples:

Joystick switch series **KF**, actuating directions **1+3** stayput switch **S**,
actuating directions **2+4** spring return switch **T**, centre position switch **Z**

KF S13 T24 Z

Joystick switch series **KF**, actuating directions **1-4** spring return switch **T**,
all-round actuation **R**

KF T1234 R



Series KE...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH




- ▶ Control panel installation to IEC 947-5-1 D22
- ▶ 1 to 8 actuating directions, 4 switching elements. With stayput or spring return operation or combined
- ▶ One changeover contact with tab connector 2.8 x 0.5 IEC 760 for each actuating direction
- ▶ Centre position switch

Dimension drawing

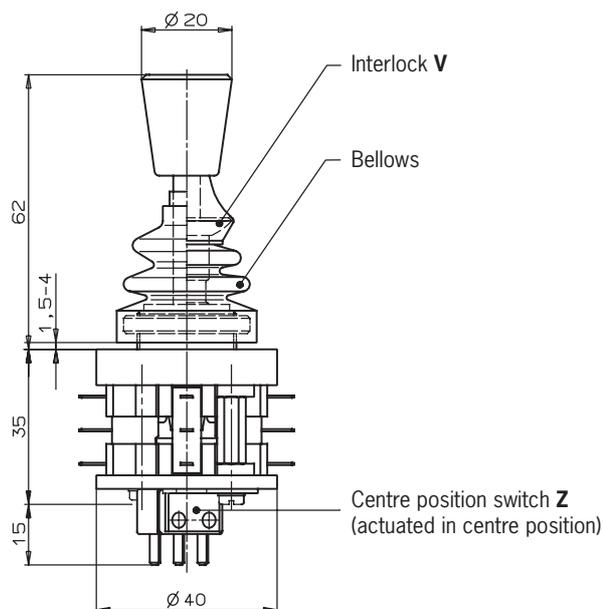

Actuating directions

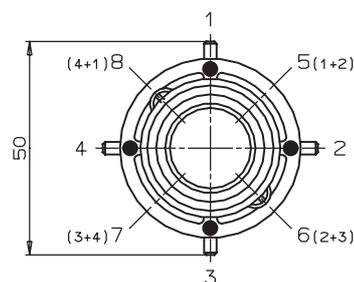

Ordering code

K	E		
----------	----------	--	--

Series

Actuating direction and switching behavior

Stayput switch **S** (switching lever latches in selected position)
Spring return switch **T** (switching lever returns to centre position)

Options

Interlock **V**
Centre position switch **Z**
All-round actuation **R**¹⁾

1) Simultaneous actuation of 2 adjacent switching elements in diagonal actuating directions.

Technical data

Parameters	Value	Unit
Housing material	Thermoset	
Switching lever material	stainless steel	
Degree of protection to IEC 529 on actuating side with bellows	IP65	
Mounting method	IEC 947-5-1 D22	
Weight	approx. 0.1	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-25 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	4	
Connection type	tab connector 2.8 x 0.5 IEC 760	
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch, type ES 587	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 4 A	
Utilization category DC 13	24 V / 2 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Contact material	silver alloy	
Short circuit protection (control circuit fuse)	slow-blow T10 / quick-blow F20	A
Max. number of actuating directions	8	
All-round actuation R	actuation of 1 switching element (vertical or horizontal) or 2 adjacent switching elements (diagonal) simultaneously	
Switching positions per direction	1	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Interlock V in centre position	Option	
Centre position switch Z	Option	

Ordering examples:

Joystick switch series **KE**, actuating directions **1+3** stayput switch **S**,
actuating directions **2+4** spring return switch **T**, centre position switch **Z**

KE S13 T24 Z

Joystick switch series **KE**, actuating directions **1+3** spring return switch **T**,
Interlock **V** in centre position

KE T13 V

Joystick switch series **KE**, actuating directions **1-4** Spring return switch **T**,
all-round actuation **R**

KE T1234 R


Series KC...

Germanischer Lloyd
Certificate no. 17 041 - 00 HH





- ▶ control panel installation at rear or with front plate
- ▶ 1 to 8 actuating directions with 1 or 2 switching positions for each actuating direction
- ▶ Switching positions as stayput or spring return operation in various combinations
- ▶ Centre position switch
- ▶ Pushbutton in handle

Dimension drawing

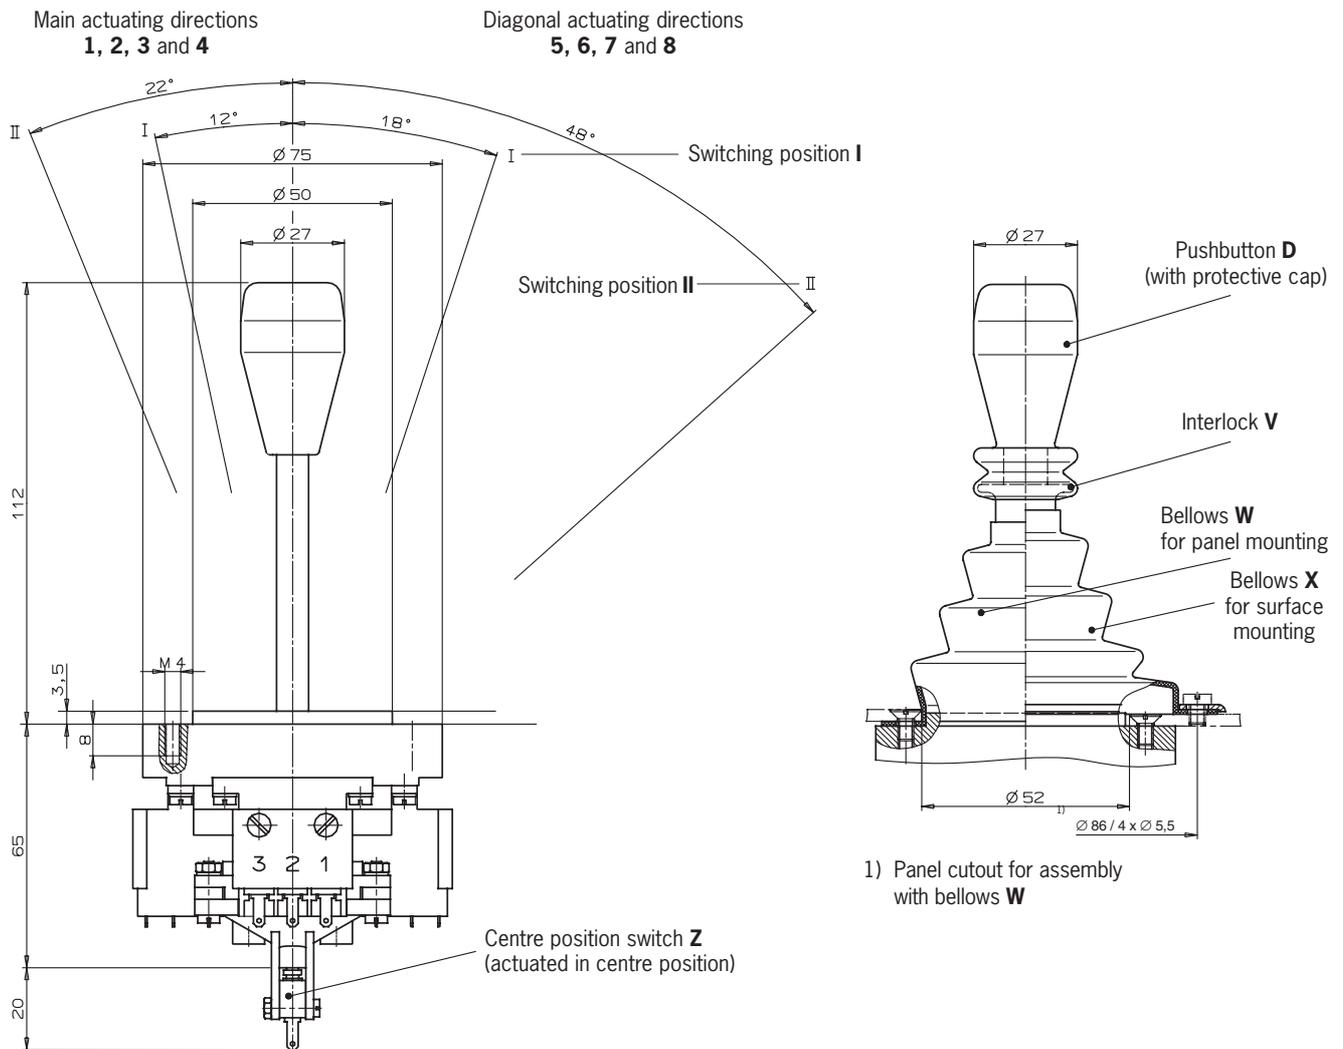

Actuating directions

Top view of actuating lever

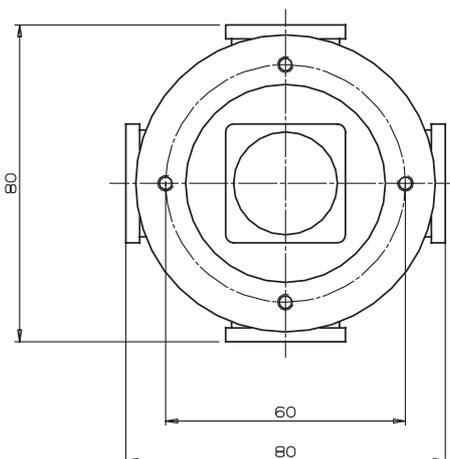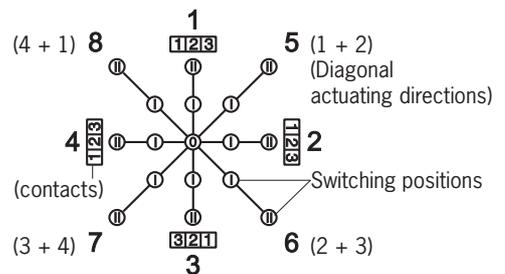

Technical data

Parameters	Value	Unit
Housing material	glass-fibre reinforced thermoplastic / aluminum	
Switching lever material	galvanized steel	
Degree of protection to IEC 529 on actuating side with / without bellows	IP65 / IP50	
Mounting method	control panel installation at rear or with front plate	
Weight	approx. 0.75	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-5 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	3 per direction	
Connection type	tab connector 2.8 x 0.5 IEC 760 (ES 584) screw terminal (ES 556)	
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch, type ES 584 or ES 556	
Rated insulation voltage U _i	250	V
Rated impulse withstand voltage U _{imp}	2.5	kV
Utilization category AC 15	230 V / 4 A	
Utilization category DC 13	24 V / 2 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Contact material	silver alloy	
Short circuit protection (control circuit fuse)	slow-blow T6 / quick-blow F10	A
Max. number of actuating directions	8	
All-round actuation R (spring return switch only)	actuation of 1 switching element (vertical or horizontal) or 2 adjacent switching elements (diagonal) simultaneously	
Switching positions per direction	1 or 2	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Bellows W, X	Option	
Interlock V in centre position or position I	Option	
Centre position switch Z	Option	
Pushbutton D	Option	
Degree of protection to IEC 529	IP65	
Electrical life	5x10 ⁴ switching cycles at 0.7 A / 250 V AC	
Contact elements	1 x NO contact	
Utilization category AC 15	230 V / 2 A	
Utilization category DC 13	24 V / 1 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Actuating force	< 8	N
Actuating travel	approx. 3	mm

Ordering examples: (see type code on page 18)

Joystick switch series **KC** with tab connector, main actuating direction 1 with 3 switching elements. As spring return switch in switching position I.

KCA3A5C005C0000V1

As stayput switch in switching position II.

Main actuating directions 2 and 4 with 2 switching elements each. As stayput switch in switching positions I and II. Main actuating direction 3 not used. Option **V1** (mech. interlock from switching position I to switching position II)

Joystick switch series **KC** with screw terminal, main actuating directions **1-4**

KCB4E4E4E4E5678DW

as stayput switch. **S** with one switching element each, diagonal actuating directions **5-8**, Pushbutton **D**, bellows **W** for panel mounting.

Series KC...

Switching behavior ¹⁾

- Stayput switch (switching lever latches in selected position)
- ⊕ Spring return switch (switching lever returns to initial position)

Ordering code	Switching position	
	I	II
1	⊕	-
2	⊕	⊕
3	⊕	●
4	●	-
5	●	●
6	●	⊕

Switching functions ²⁾

		Contact state in switching position							
		0	I	II					
A	1				F	1			
	2					2			
	3					3			
B	1				G	1			
	2					2			
	3					3			
C	1				H	1			
	2					2			
	3					3			
D	1				K	1			
	2					2			
	3					3			
E	1								
	2								
	3								

Ordering code

Series

Connection type

Tab connector 2.8 x 0.5 IEC 760
Screw terminal

Main actuating direction 1

Switching behavior ¹⁾
Switching function ²⁾

Main actuating direction 2

Switching behavior ¹⁾
Switching function ²⁾

Main actuating direction 3

Switching behavior ¹⁾
Switching function ²⁾

Main actuating direction 4

Switching behavior ¹⁾
Switching function ²⁾

Diagonal actuating direction 5 ³⁾

Diagonal actuating direction 6 ³⁾

Diagonal actuating direction 7 ³⁾

Diagonal actuating direction 8 ³⁾

Options

Pushbutton in handle
Bellows for panel mounting
Bellows for surface mounting
Interlock switching position 0
Interlock switching position I to II
Centre position switch
All-round actuation

D
W
X
VO
V1
Z
R

¹⁾ See „Switching behavior“ table. Actuating directions which are not required must be marked with „0“.

²⁾ See „Switching functions“ table.



³⁾ Simultaneous actuation of 2 adjacent switching elements in diagonal actuating directions.

Series KP...

Analog Joystick



- ▶ control panel installation at rear or with front plate
- ▶ Analog, proportional output signals
- ▶ Control variants with 1 and 2 axes or 2 axes simultaneously
- ▶ Centre position switch
- ▶ Pushbutton in handle

Dimension drawing

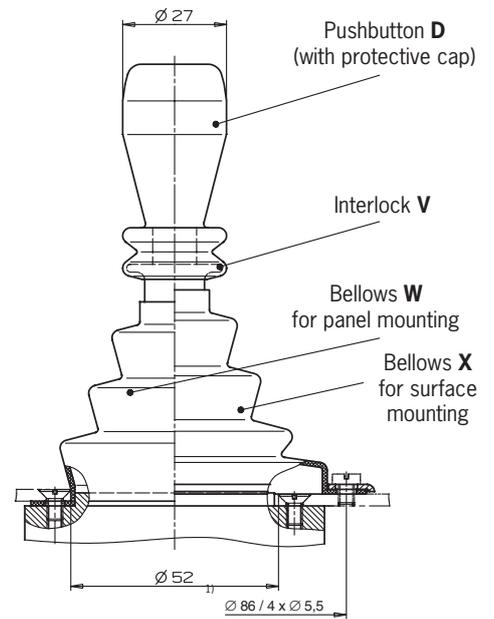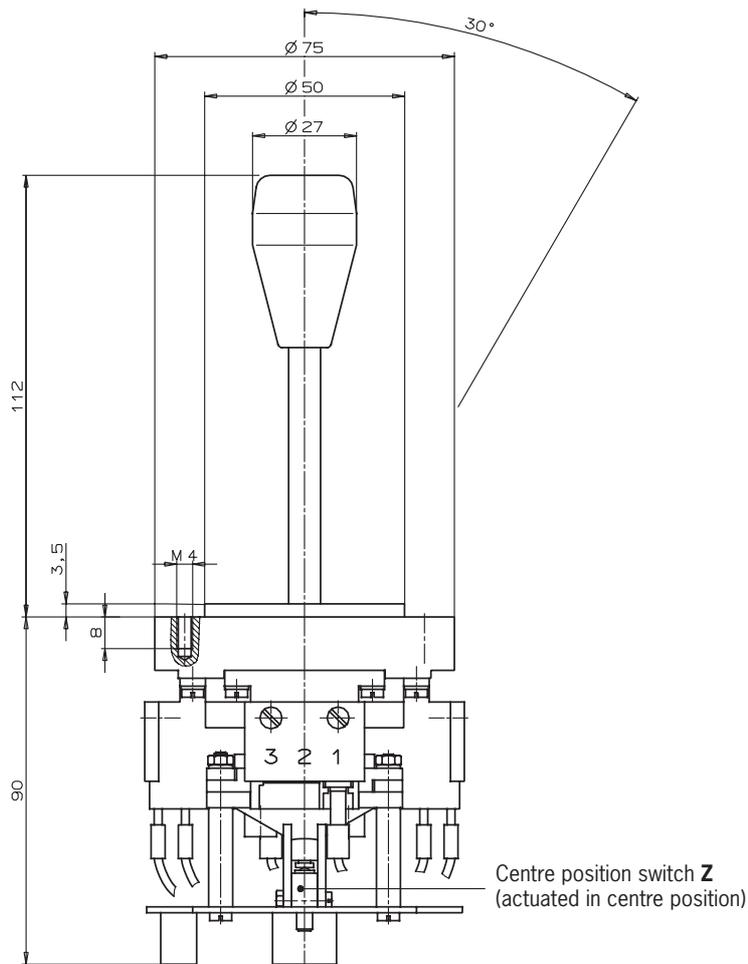

Control versions


- Versions 1 = 1 axis
- Versions 2 = 2 axes
- Versions 3 = 2 axes simultaneously (only spring return version)

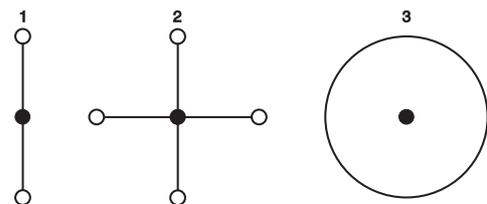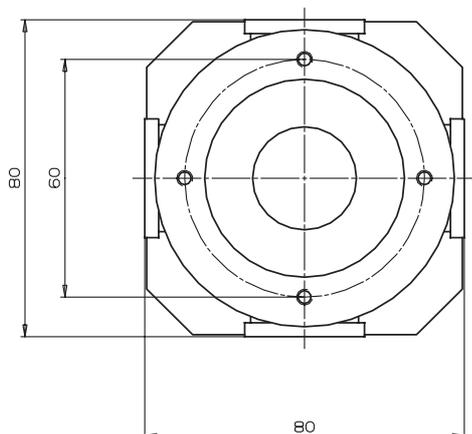

Technical data

Parameters	Value	Unit
Housing material	glass-fibre reinforced thermoplastic / aluminum	
Switching lever material	galvanized steel	
Degree of protection to IEC 529 on actuating side with / without bellows	IP65 / IP50	
Mounting method	control panel installation at rear or with front plate	
Weight	approx. 0.75	kg
Mechanical life	1x10 ⁶ switching cycles	
Ambient temperature with spring return switch	-5 to +65	°C
Ambient temperature with stayput switch	-25 to +65	°C
Max. number of switching elements	1 per direction	
Connection type	screw terminal on PC board	
Contact elements	changeover contact C IEC 947-5-1	
Switching principle	snap-action switch	
Rated insulation voltage U _i	50	V
Contact material	silver alloy	
Input voltage of resistance element	± 18	V=
Output voltage of resistance element	± 10	V=
Max. number of actuating directions	1 axis, 2 axes or 2 axes simultaneously	
Stayput switch S (latching)	according to type designation	
Spring return switch T	according to type designation	
Bellows W, X	Option	
Interlock V in centre position	Option	
Centre position switch Z	Option	
Pushbutton D	Option	
Degree of protection to IEC 529	IP65	
Electrical life	5x10 ⁴ switching cycles at 0.7 A / 250 V AC	
Contact elements	1 x NO contact	
Utilization category AC 15	230 V / 2 A	
Utilization category DC 13	24 V / 1 A	
Min. switching current at 24 V	12	mA
Min. switching voltage	10	V
Actuating force	< 8	N
Actuating travel	approx. 3	mm



Universal Power Supply Unit P1/P2 Order No. 096 645

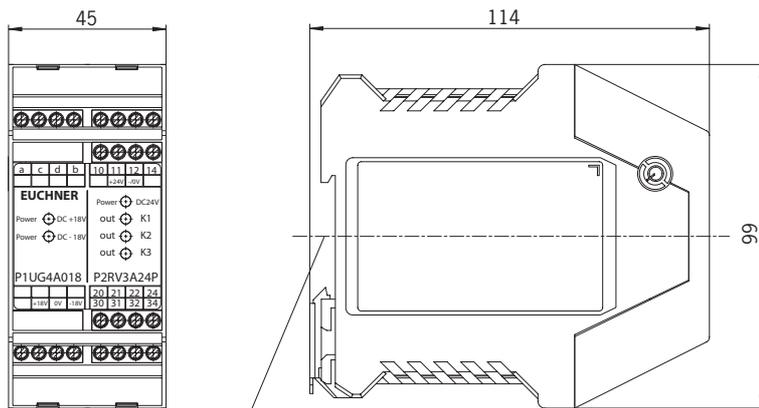

suitable for DIN rail according to DIN EN 50022-35

Connection to power supply

with AC 115 V or AC 230 V

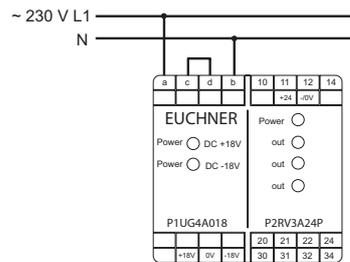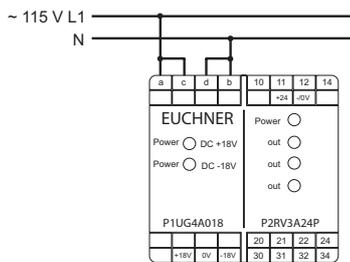


The universal power supply unit P1/P2 comprises the unit P1UG4A018 (P1) for the supply of the EUCHNER series KP joystick.

The unit P2RV3A24P (P2) is used as a switch amplifier for the connection of three inductive proximity switches or single hole fixing limit switches. In addition, it can also be used as a simple power supply. The units can be operated separately or together.

Use as switch amplifier


(connection example with inductive proximity switches)

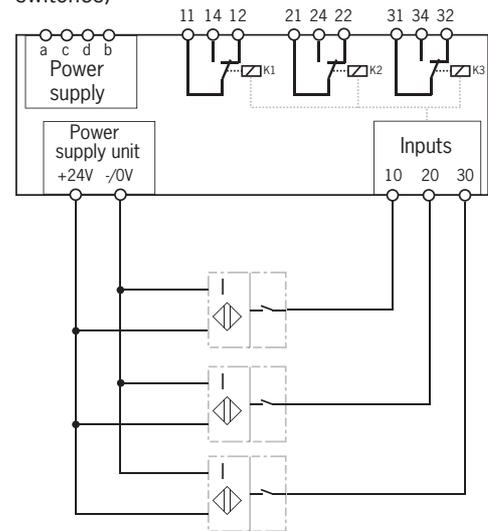

Parameter	Value	Unit
Housing material	Polyamide PA6.6	
Degree of protection acc. to EN/IEC 60529	IP 20	
Ambient temperature at $U_B = DC 24 V$	-15 ... +55	°C
Storage temperature	-25 ... +70	°C
Degree of contamination (external)	2 (acc. to EN 60947)	
Material rroup	II	
Mounting	DIN rail 35 mm according to DIN EN 50022-35	
Weight	0.4	kg
Connection type	Connection terminals	
Conductor cross-section	0.14 ... 2.5	mm ²
Primary voltage	AC 115 V ± 10 % AC 230 V ± 10 %	
Line frequency	50 ... 60	Hz
External fuse (transformer, electrically isolated)	2 x 160 mA, slow blow	
Max. power consumption, P1 and P2 together	5.4	VA
P1UG4A018		
Output voltage, regulated	DC -18 V and DC +18 V	
Load current I_{max}	50	mA
Power consumption	5.4	VA
P2RV3A24P		
Control circuit voltage at		
I_{max}	24	DC V
I (nominal current)	30	DC V
Power consumption	2.7	VA
Control current I_{max}	70	mA
Output contacts	3 NC 3 NO	
Max. switching voltage	250	AC/DC V
Max switching current	4	A
Breaking capacity		
AC	500	VA
DC	50	W

Housing HBL

Dimension drawing

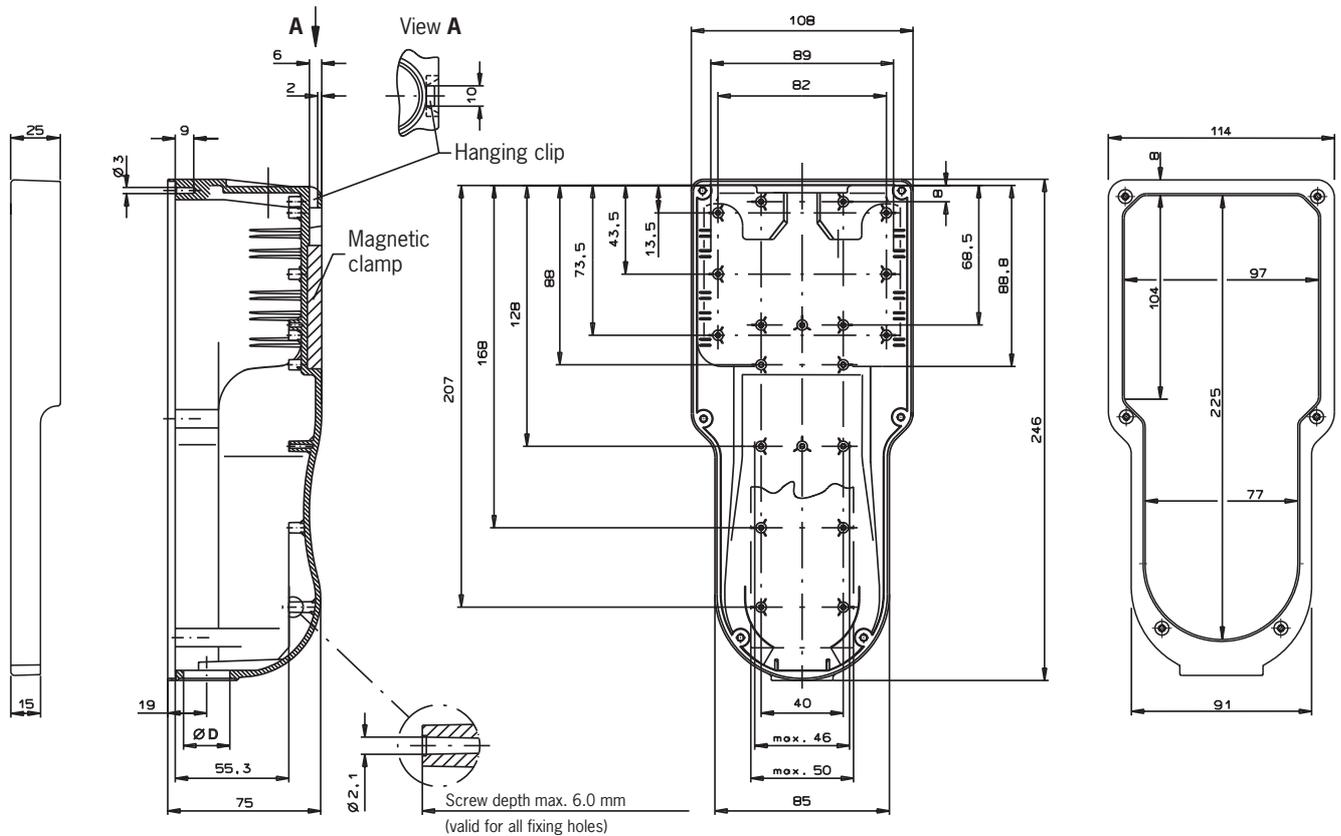

Note

- ▶ 2 versions for different cable glands

Design	Ø D
PG 11	19
PG 13.5	20.8

Technical data


Parameters	Value	Unit
Housing HBL		
Material	Polyamide	
Color	blue-grey RAL 7031	
Ambient temperature	0 to +55	°C
Degree of protection to EN 60529	to IP 65	
Weight	approx. 0.4	kg

Ordering table

Design	Type designation	Order No.
PG 11	Housing HBL, with magnetic clamp, hanging clip, fixing nut for heavy gauge cable gland PG 11, 6 screws for front plate attachment, cover frame	073 098
PG 13.5	Housing HBL, with magnetic clamp, hanging clip, fixing nut for heavy gauge cable gland PG 13.5, 6 screws for front plate attachment, cover frame	072 630

Front plate for housing HBL

Dimension drawing

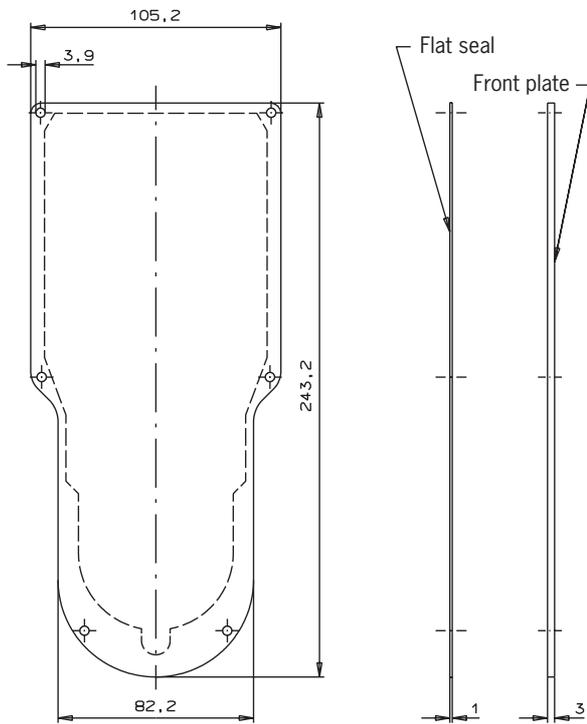

Technical data

		Material
Material front plate		electro-anodized aluminum, black
Material seal		NBR, self-adhesive on one side

Ordering table

Type designation	Order No.
Front plate for HBL housing, with seal	055 967

International representation

Australia

Micromax Sensors & Automation
112 Beaconsfield St
Auburn NSW 2144
Tel. +61-2-4271-1300
Fax +61-2-4271-8091
micromax@micromax.com.au

Austria

EUCHNER G.m.b.H.
Süddruckgasse 4
2512 Tribuswinkel
Tel. +43-2252-421-91
Fax +43-2252-452-25
info@euchner.at

Benelux

EUCHNER (BENELUX) BV
Visschersbuurt 23
3350 AC Papendrecht
Tel. +31-78-6154-766
Fax +31-78-6154-311
info@euchner.nl

Brazil

EUCHNER Ltda
Av. Prof. Luiz Ignácio Anhaia Mello,
no. 4387
S. Lucas
São Paulo - SP - Brasil
CEP 03295-000
Tel. +55-11-2918-2200
Fax +55-11-2301-0613
euchner@euchner.com.br

Canada

IAC & Associates Inc.
2180 Fasan Drive
Unit A
Oldcastle, Ontario
NOR 1L0
Tel. +1-519-737-0311
Fax +1-519-737-0314
sales@iacnassociates.com

China

EUCHNER (Shanghai) Trading Co., Ltd.
Unit C, Floor 20
Cross Region Plaza
No. 899 Lingling Road
Xuhui District
Shanghai, 200030
Tel. +86-21-5774-7090
Fax +86-21-5774-7599
info@euchner.com.cn

Czech Republic

EUCHNER electric s.r.o.
Spielberk Office Center
Holandská 8
639 00 Brno
Tel. +420-533-443-150
Fax +420-533-443-153
info@euchner.cz

Denmark

Duelco A/S
Mommarmvej 5
6400 Sønderborg
Tel. +45-7010-1007
Fax +45-7010-1008
info@duelco.dk

Finland

Sähkölehto Oy
Holkkitie 14
00880 Helsinki
Tel. +358-9-774-6420
Fax +358-9-759-1071
office@sahkolehto.fi

France

EUCHNER France S.A.R.L.
Parc d'Affaires des Bellevues
Allée Rosa Luxembourg
Bâtiment le Colorado
95610 ERAGNY sur OISE
Tel. +33-1-3909-9090
Fax +33-1-3909-9099
info@euchner.fr

Hong Kong

Imperial Engineers & Equipment Co. Ltd.
Unit B 12/F Cheung Lee Industrial Building
9 Cheung Lee Street Chai Wan
Hong Kong
Tel. +852-2889-0292
Fax +852-2889-1814
info@imperial-elec.com

Hungary

EUCHNER Ges.m.bH
Magyarországi Fióktelep
2045 Törökbálint
FSD Park 2.
Tel. +36-2342-8374
Fax +36-2342-8375
info@euchner.hu

India

EUCHNER Electric (India) Pvt. Ltd.
West End River View
40, First Floor
Survey No. 169/1, Aundh
Pune 411007
Tel. +91-20-6401 6384
Fax +91-20-2588 5148
info@euchner.in

Teknic Euchner Pvt. Ltd.

64, Electronics City
Hosur Road
Bangalore 560100
Tel. +91-80-28520711
Fax +91-80-28520900
marketing@teknic-euchner.co.in

Israel

Ilan At Gavish Automation Service Ltd.
26 Shenkar St. Qiryat Arie 49513
P.O. Box 10118
Petach Tikva 49001
Tel. +972-3-922-1824
Fax +972-3-924-0761
mail@ilan-gavish.com

Italy

TRITECNICA S.r.l.
Viale Lazio 26
20135 Milano
Tel. +39-02-5419-41
Fax +39-02-5501-0474
info@tritecnica.it

Japan

Solton Co. Ltd.
2-13-7, Shin-Yokohama
Kohoku-ku, Yokohama
Japan 222-0033
Tel. +81-45-471-7711
Fax +81-45-471-7717
sales@solton.co.jp

Korea

EUCHNER Korea Co., Ltd.
RM 810 Daerung Technotown 3rd
#448 Gasang-Dong
Kumchon-Gu, Seoul
Tel. +82-2-2107-3500
Fax +82-2-2107-3999
info@euchner.co.kr

Mexico

SEPIA S.A. de C.V.
Maricopa # 10
302, Col. Napoles.
Del. Benito Juarez
03810 Mexico D.F.
Tel. +52-55-5536-7787
Fax +52-55-5682-2347
alazcano@sepia.mx

Poland

ELTRON
Pl. Wolności 7B
50-071 Wrocław
Tel. +48-71-3439-755
Fax +48-71-3460-225
eltron@eltron.pl

Republic of South Africa

RUBICON ELECTRICAL DISTRIBUTORS
4 Reith Street, Sidwell
6061 Port Elizabeth
Tel. +27-41-451-4359
Fax +27-41-451-1296
sales@rubiconelectrical.com

Romania

First Electric SRL
5, Luterana Street
App. 27, Sector 1
010161 Bucharest
Tel. +40-21-31231-39
Fax +40-21-31131-93
office@firstelectric.ro

Singapore

Sentronics Automation & Marketing Pte Ltd.
Blk 3, Ang Mo Kio Industrial Park 2A
#05-06
Singapore 568050
Tel. +65-6744-8018
Fax +65-6744-1929
sentronics@pacific.net.sg

Slovakia

EUCHNER electric s.r.o.
Spielberk Office Center
Holandská 8
639 00 Brno
Tel. +420-533-443-150
Fax +420-533-443-153
info@euchner.cz

Slovenia

SMM d.o.o.
Jaskova 18
2000 Maribor
Tel. +386-2450-2326
Fax +386-2462-5160
franc.kit@smm.si

Spain

EUCHNER, S.L.
Gurutzegi 12 - Local 1
Polígono Belartza
20018 San Sebastian
Tel. +34-943-316-760
Fax +34-943-316-405
comercial@euchner.es

Sweden

Censit AB
Box 331
33123 Värnamo
Tel. +46-370-6910-10
Fax +46-370-1888-8
info@censit.se

Switzerland

EUCHNER AG
Grofstrasse 17
8887 Mels
Tel. +41-81-720-4590
Fax +41-81-720-4599
info@euchner.ch

Taiwan

Daybreak Int'l (Taiwan) Corp.
3F, No. 124, Chung-Cheng Road
Shihlin 11145, Taipei
Tel. +886-2-8866-1234
Fax +886-2-8866-1239
day111@ms23.hinet.net

Thailand

Aero Automation Co., Ltd.
600/441 Moo 14 Phaholyothin Rd.
Kukot, Lam Lukka
Patumthanee 12130
Tel. +66-2-536-7660-1
Fax +66-2-536-7877
aeroautomation@yahoo.co.th

Turkey

Entek Otomasyon Urunleri San.ve Tic.Ltd.Sti.
Perpa Tic.Mer. B Blok
Kat: 11 No:1622 - 1623
34384 Okmeydani / Istanbul
Tel. +90-212-320-2000 / 01
Fax +90-212-320-1188
entekotomasyon@entek.com.tr

United Kingdom

EUCHNER (UK) Ltd.
Unit 2 Petre Drive,
Sheffield
South Yorkshire
S4 7PZ
Tel. +44-114-256-0123
Fax +44-114-242-5333
info@euchner.co.uk

USA

EUCHNER USA Inc.
6723 Lyons Street
East Syracuse, NY 13057
Tel. +1-315-7010-315
Fax +1-315-7010-319
info@euchner-usa.com

EUCHNER USA Inc.

Detroit Office
130 Hampton Circle
Rochester Hills, MI 48307
Tel. +1-248-537-1092
Fax +1-248-537-1095
info@euchner-usa.com

EUCHNER GmbH + Co. KG

Kohlhammerstraße 16

70771 Leinfelden-Echterdingen

Germany

Tel. +49-(0)711-7597-0

Fax +49-(0)711-753316

info@euchner.de

www.euchner.com

More than safety.



EUCHNER